




# Primer DC

Pretreatment primer for improving adhesion of MS Polymer based adhesives and sealants on porous surfaces

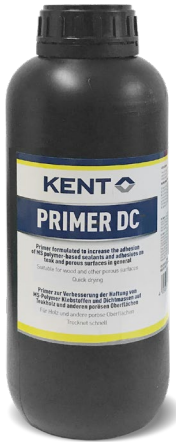

## Features & Benefits

- Improves adhesion on porous surfaces - ideal for wood, cement, concrete, etc.
- Seals dust particles on porous substrates - for a dust-free surface

P/N	Product	S/C	Packaging
86532	Primer DC	KPDC	800 g bottle

## Application

Primer DC is used for pretreatment of mineral substrates, such as brickwork, concrete and lightweight concrete and pretreatment of wooden substrates (such as seams in teakwood ship decks).

When Primer DC is applied on light coloured substrates (for example on natural stone), despite the fact that the primer is basically clear, a dark colour/shadow can occur.

Not recommended for locations subject to continuous water emersion and not for PP, PE, Teflon, neoprene and bituminous substrates.

## Instructions

1. Sand or brush the substrates before applying Primer DC.
2. Ensure that substrates are cleaned, firm, dry, dust and grease free, using KENT Soft Surface Cleaner.
3. Pour as much Primer DC as can be used within 30 minutes into a clean recipient and immediately close the original bottle firmly. Stir well.
4. Using a clean brush, apply KENT Primer DC onto the adhesion surface in a continuous coat or film. The application temperature should be within 5°C to 30°C. Allow a minimum of 20 minutes for the primer to dry.
5. Best results are obtained when the bonding/sealing is made within 6 hours of applying the primer, therefore, do not apply more KENT Primer DC than can be sealed within 6 hours.



## Technical Information

<b>Base:</b>	Epoxy
<b>Consistency:</b>	Liquid
<b>Colour:</b>	Transparent
<b>Shelf life:</b>	6 months
<b>Custom tariff code:</b>	39095090
<b>VOC:</b>	665 g/l

---

<b>Pot life:</b>	30 minutes
<b>Drying time:</b>	20 minutes
<b>Open time:</b>	6 hours
<b>Coverage:</b>	3-5 m <sup>2</sup> /l
<b>Application temp:</b>	+5°C to +30°C
<b>Specific gravity:</b>	0.94 g/ml



SDS available on [www.kent europe.com](http://www.kent europe.com)

### Terms and Conditions

No part of this publication may be reproduced, transmitted or stored, electronically, mechanically or photocopied without the prior permission of KENT (United Kingdom) Ltd. This data sheet and its contents (the "Information") belong to KENT (United Kingdom) Ltd, or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted.

The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error from or omission in it nor for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including

liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence KENT is the trading name of KENT (United Kingdom) Ltd.

**Registered Office:** Amber House,  
Showground Road, Bridgewater, Somerset, United Kingdom TA6 6AJ  
*All rights reserved*

**KENT (United Kingdom) Ltd, Forsyth House, Pitreavie Drive, Pitreavie Business Park, Dunfermline, Fife KY11 8US** Tel : 0800 136925 or 01383 723344 between 08:30-17:30 Monday-Thursday, 09:00-15:00 on Fridays'. For out of hours queries please Fax us on 01383 735829 or Email: [kentinfo.uk@kent europe.com](mailto:kentinfo.uk@kent europe.com)

REV: 17/09/2019